

H3 :: H-SMO-B :: H-SMWA-K


Excavator & mulcher. A winning couple for greenspace maintenance!

features	H3	H-SMO-B	H-SMWA-K
mulches grass and brush up to	3 cm [1.2"] Ø	7 cm Ø	5 cm [2"] Ø, 12 cm [5"] Ø with forestry rotor
for excavators	from 2 to 5 tons [4,400-11,000 lb]	from 5 to 13 tons [11,000-28,700 lb]	from 3 to 8 tons [6,000-16,000 lb]
transmission with hyd. motor*	S	S	S
predisposed for interface plate	S	S	S
indirect transmission with	3 belts	4 belts	3 belts (4 with boom SBM)
adjustable hood	X	rear	front
front protection	chains	chains	chains
rear protection	rubber flap	rubber flap	rubber flap
adjustable support roller	S	S	S
standard rotor	SMW flails	SMO flails	SMW DUO flails

S: standard - O: option - X: not available
* your SEPPi dealer can help you choose the right motor

The models H3, H-SMO-B and H-SMWA-K are strong and versatile mulchers for maintaining wasteland and areas difficult to access. These mulchers can be mounted on small and medium tracked excavators or excavators with tyres. A suitable hydraulic system is necessary for operation.

H-SMWA-K:
The new SMW DUO hammer allows the rotor to be operated in both directions. The new hammer is based on the hugely successful SMW hammer and will cut grass, hedges and bushes.

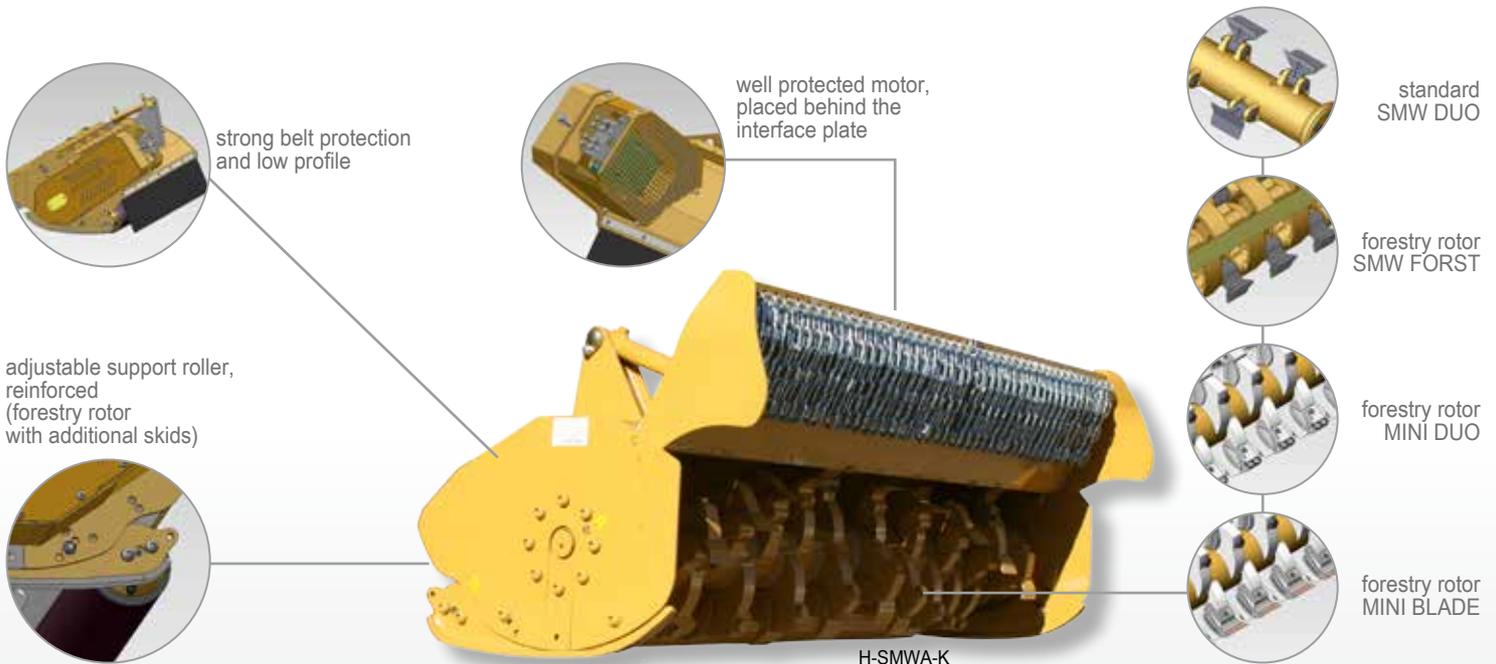

	working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* standard kg [lb]	weight* w. forestry rotor kg [lb]	SMW DUO #	SMW FORST #	M.DUO M.BLADE #	roller Ø mm	max. pressure bar [PSI]	oil flow l/min [gal/min]
H-SMWA-K	85 [33]	100 [39]	95 [37]	65 [26]	280 [617]	370 [816]	9	13	18	152 [6]	150-350 [2.175-5,076]	60-150 [15.9-39.6]
	105 [41]	120 [49]	95 [37]	65 [26]	325 [717]	425 [937]	9	17	21			
	125 [49]	140 [55]	95 [37]	65 [26]	370 [816]	480 [1,058]	12	20	27			
	155 [61]	170 [67]	95 [37]	65 [26]	420 [926]	540 [1,190]	15	26	33			

* The weight of the machine refers to the standard, without options, and may vary.

