



Perfect mulching on ditches and large areas.

features	SAV	
mulches grass and bushes up to	7 cm [2,8"] / 12 cm [4,7"] Ø	
working speed	3 - 7 km/h	
ISO 3-point linkage	cat. 2 rear	
side shift	hydraulic	
positioning	hydraulic from +90° to -65°	
gearbox with freewheel	up to 200 cm	540 rpm
	from 225 cm	1000 rpm
input shaft	1 3/8" Z=6	
transmission	multiband (6 belts) "Power-Belt"	
belt cover	with chevron for working & transportation on public street	
front protection	chains	
rear protection	rubber flap	
adjustable support roller	on hitch and mulcher	
breakaway device	standard	
required hydraulic service fittings	2 double acting	
standard rotor	SMO flails	

SAV is a professional side mulcher for ditches, canals and river banks. It is equipped with hydraulic side shift and ample angle adjustments, and it mulches grass and brush up to 7 cm Ø [2.8"], or up to 12 cm [4.7"], if equipped with forestry rotor. Rear flap with direct discharge.




belt transmission with spring tension and safety coupling



3-point linkage with spring tension and parallel-linkage side shift

the cover with easy access to the drive system provides extra protection, and keeps out dirt

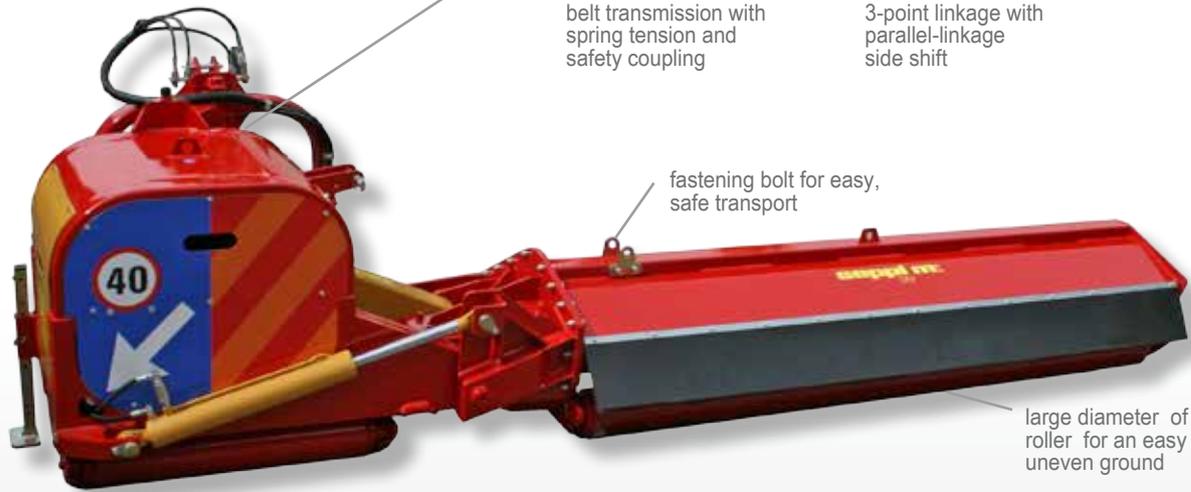

fastening bolt for easy, safe transport

large diameter of the roller for an easy work on uneven ground


SAV									
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight ¹ kg [lb]	min. tractor weight ² kg [lb]	flails standard #	Y knives OPT 030 #	roller Ø mm ["]	HP min-max
150 [59]	160-310 [63-122]	140 [55]	85-210 [33-83]	1.115 [2,458]	4.000 [8,800]	15	21	152 [6.0]	80-150
175 [69]	160-345 [63-136]	140 [55]	85-235 [33-93]	1.145 [2,524]	4.200 [9,300]	18	24	152 [6.0]	80-150
200 [79]	160-370 [63-146]	140 [55]	85-260 [33-102]	1.215 [2,679]	4.700 [10,400]	21	30	152 [6.0]	80-150
225 [89]	170-400 [67-157]	150 [59]	100-285 [39-112]	1.345 [2,965]	5.400 [11,900]	24	33	168 [6.6]	100-150
250 [98]	170-425 [67-167]	150 [59]	100-310 [39-122]	1.415 [3,120]	5.900 [13,000]	27	36	168 [6.6]	100-150
275 [108]	170-450 [67-177]	150 [59]	100-335 [39-132]	1.485 [3,274]	6.400 [14,100]	27	42	168 [6.6]	100-150

¹ The weight of the machine is approximate, it refers to the standard version without any options and it may vary.

² The minimum tractor weight is approximate and depends on many factors, such as tractor wheel width and length. More information in the safety instructions.



SAV: side shift and angling

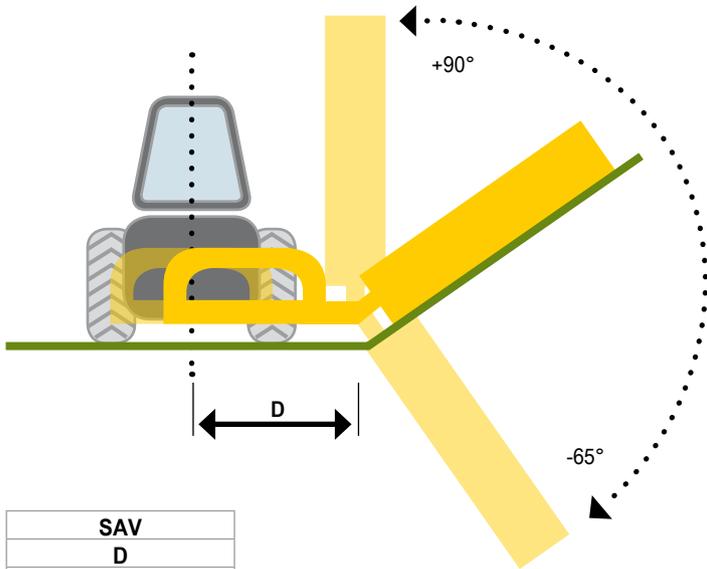


SAV
D
84 - 152 cm [33-60"]

The offsetting mulcher **SAV** comes with hydraulic angling from 90° up, to 65° down. According to the working width, the mulcher reaches a maximum position of 402 cm [158"] to the right.

SAV	
options	OPT
PTO with freewheel	011
rotor with 3 Y knives	030
swinging hammer forestry rotor (up to 200 cm)	240
fixed knife forestry rotor (up to 200 cm)	228
540 rpm gearbox	019
1000 rpm gearbox	018
accumulator to follow the contours of the ground	001
adjustable front hood	317
additional rubber safety protection	006
adjustable hood with rubber protection	087
conveyer belt for side discharge (up to 200 cm)	XTR




SMW and SMO rotor

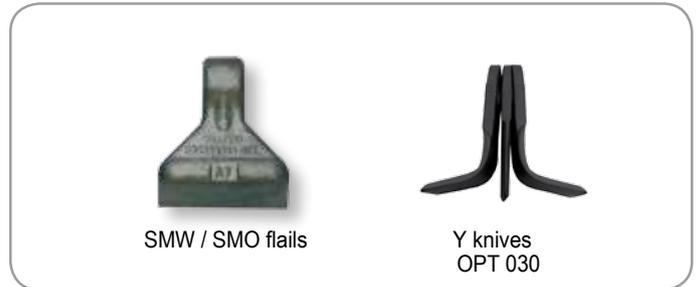

SMW / SMO flails

Y knives
OPT 030

SMW / SMO flails are standard
Y knives are optional

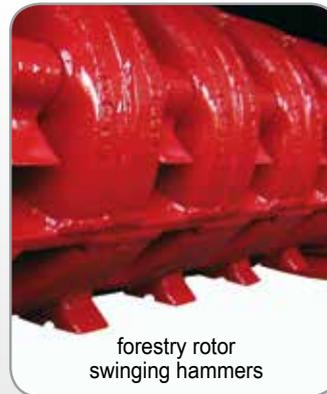

forestry rotor
swinging hammers



forestry rotor
fixed knives MINI DUO



swinging hammers
OPT 240



fixed knives
OPT 228 "MINI DUO"

optional on **SAV**