# seppi m.®

**MULCHING EQUIPMENT SPECIALISTS**



## Quality by Design

# PICK-UP MULCHER

**SMO** PICK-UP
**MINIFORST** PICK-UP

Certain crops produce very high quantities of prunings. This can cause big problems when it is time to mulch them. Burning is always bad for the environment. The MINIFORSTpick-up provides a perfect solution – picking up the prunings with a pick up reel at ground level and, if needed, reinforcing the feed into the machine with an optional top reel. The prunings are then processed within a screen to produce a fine and uniform mulch.

**You don't need to remove prunings anymore. When you use a SEPPI pick-up mulcher it will be mulched finely, through a fine mulching grid. This results in a fast biodegradation, within one season.**

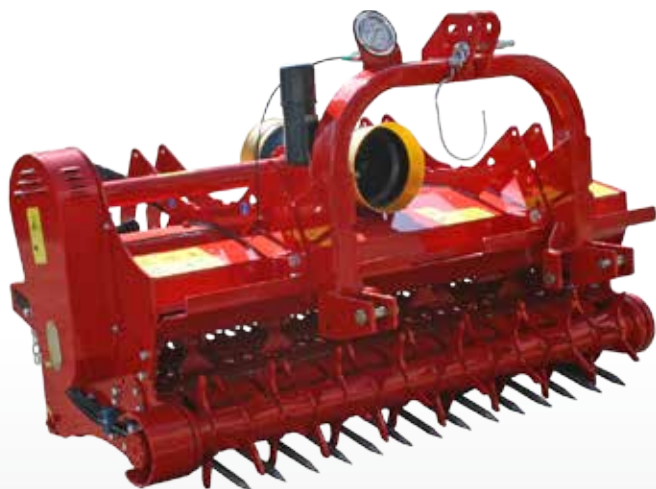A modular system makes the standard mulcher to a pick-up model ►

SMO rev cf / MINIFORST **+** PICK-UP **=** SMO pick-up / MINIFORST pick-up

## SMO PICK-UP

SMO pick-up is used in vineyards, in orchards and olive groves, it mulches material up to 7 cm in diameter. This mulcher works rocky and uneven terrains; with the fine mulch grid the result of the cutted material is finely and homogeneously.



| features | SMO pick-up |
|---|---|
| mulches grass and prunings up to | 7 cm [2.8"] Ø |
| working speed | 3-5 km/h |
| ISO 3-point linkage | cat. 1 & 2 rear or front or reverse/pushed |
| gearbox with freewheel and through shaft | 540 rpm OPT 018: 1000 rpm |
| gearbox 540 rpm with automatic inverter and double freewheel for reversible tractors | OPT 066 |
| modular lower pick up kit for material feed with grid including rotor | S |
| pressure gauge and flow control | S |
| support roller, adjustable in height | 5 cm |
| rubber gauge wheels | OPT 035 |
| protection | with chains |
| rotor with SMO flails | S |

S: standard - OPT: option

| SMO pick-up | | | | | | | |
|---|---|---|---|---|---|---|---|
| working width cm ["] | overall width cm ["] | depth cm ["] | height cm ["] | weight* kg [lb] | standard SMO flails # | required hydraulic flow l/min [gpm] | HP min-max |
| 125 [49] | 142 [56] | 126 [50] | 122 [48] | 800 [1,760] | 12 | 20 [5.3] | 50-100 |
| 150 [59] | 167 [66] | 126 [50] | 122 [48] | 910 [2,000] | 15 | 20 [5.3] | 50-100 |
| 175 [69] | 192 [76] | 126 [50] | 122 [48] | 1.020 [2,250] | 18 | 20 [5.3] | 50-100 |
| 200 [79] | 217 [85] | 126 [50] | 122 [48] | 1.130 [2,490] | 21 | 20 [5.3] | 50-100 |

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.