

Mulcher with generous side shift.

features	SMWO
mulches grass and prunings up to	5 cm [2"] Ø
working speed	3-10 km/h
ISO 3-point linkage	cat. 1 & 2
parallel linkage side shift	standard
gearbox with freewheel and through shaft	540 rpm
input shaft	1 3/8" Z=6
number belts	up to 155 cm: 3 from 175 cm: 4
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	metal flaps
standard rotor	SMW flails


The model **SMWO** is distinguished by an extraordinarily wide side shift to the right.

The parallel linkage system allows the machines to work under the trees and close to the crop leaving a much cleaner result.

OPT	options
008	PTO drive shaft
030	rotor with Y flails
018	1000 rpm gearbox
046	hydraulic side shift
028	rake hood with rakes
025	front protection with chains
006	additional rubber front protection
162	chevrons for transportation on public roads
-	equipment for under canopy maintenance (see separate brochure)



counterknives inside the casing gives a perfect result while mulching




rake hood with rakes to pick up prunings



SMWO (standard) parallel linkage side shift

L = 125-150 L = 155-200
 d = 73 cm [29"] d = 81 cm [32"]
 D = 62 cm [24"] D = 62 cm [24"]

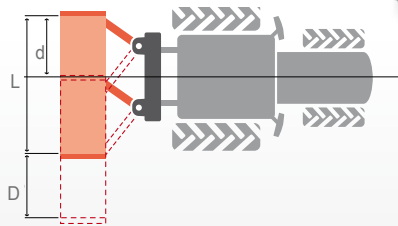

SMWO								
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	SMW flails standard #	Y-flails OPT 030 #	roller mm ["] Ø	HP min-max
125 [49]	137 [54]	120 [47]	95 [37]	350 [774]	12	18	133 [5.2]	30-65
135 [53]	147 [58]	120 [47]	95 [37]	400 [878]	12	18	133 [5.2]	30-65
145 [57]	157 [62]	120 [47]	95 [37]	420 [926]	15	21	133 [5.2]	30-65
155 [61]	167 [66]	120 [47]	95 [37]	430 [948]	15	21	133 [5.2]	30-65
175 [69]	187 [74]	120 [47]	95 [37]	480 [1,050]	18	24	133 [5.2]	40-90
200 [79]	212 [83]	120 [47]	95 [37]	500 [1,100]	21	30	133 [5.2]	40-90

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.

