

Be forward looking!


features	SBM avs
ISO 3-point rear linkage with stabilizers	2. & 3. cat.
gearbox	540 rpm
hydraulic breakaway	S
independent hydraulic system with oil cooler	100+60 l/min [26+16 GPM] max. 250 bar [3,630PSI]
hydr. pumps and closed circuit piston motor	reverse direction of rotation possible
ergonomical joystick	S
proportional electric remote control	S
EHS system	S
AVS system	S
mulches grass and brush up to	5 cm [2"] Ø
rear lamp kit with anticollision bar	O

S: standard - O: option - X: not available

The unique AVS system allows the **SBM avs** to place the cutting head well forward and in clear view of the operator. This increases the control of the boom mounted mulcher enormously. The driver can react quickly if unexpected obstacles such as stones, stumps or other material block its path.

This increases safety while mulching. For the driver the safety increases as well - thanks to this improved model, he can concentrate on his work without the need to turn his head.



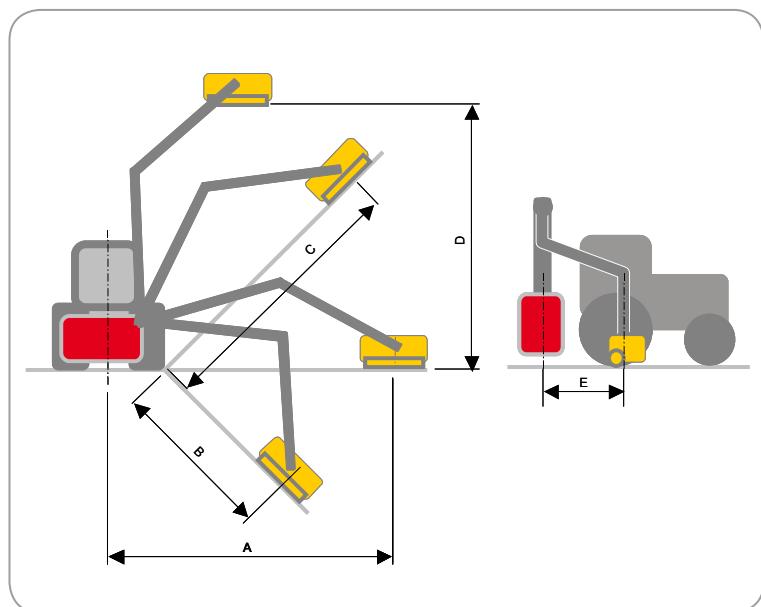

SBM avs	
A	5,8 m [228"]
B	2,5 m [98"]
C	4,8 m [189"]
D	5,5 m [217"]
E	1,06 m [42"]

mulching head and tools

H-SML			
larghezza lavoro cm	rullo Ø mm	rotore con martelli SMW n°	rotore con lame Y n°
125 [49]	133 [5.2]	12	15
155 [61]	133 [5.2]	15	21

boom length cm ["]	weight* kg [lb]	min. tractor-weight kg [lb]	shipping size			kW** min-max	HP** min-max	
			width cm ["]	depth cm ["]	height cm ["]			
SBM + H-SML	650 [256]	1.860 [4,100]	5.000 [11,020]	418 [165]	150 [59]	267 [105]	50-110	67-150

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.

** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.

